


EQUIPMENT SPECIFICATION

HEAVY DUTY DRIVEN ROLLER TRANSPORTATION CONVEYOR – Model RTC

ROLLER LENGTH:	Refer to equipment schedule Standard at 800 – 1300mm in 100mm increments.
FRAME:	Press formed channel sections from 4mm thick steel 300mm deep, with 42mm flanges.
ROLLER SPECIFICATION:	Zinc plated roller 80mm \varnothing x 2mm
ROLLER PITCH:	Refer to schedule Standard at 125, or 150mm
DRIVE MOTOR:	SEW-reduction geared motor, 400 volt, 50 Hz
ROLLER DRIVE:	Tangential chain driven via 5/8" pitch Simplex chain.
SUPPORTING ARRANGEMENTS:	The conveyor is provided with adjustable floor supports. To satisfy required conveying heights.
GUARDING:	To current European standard CE marked as required.

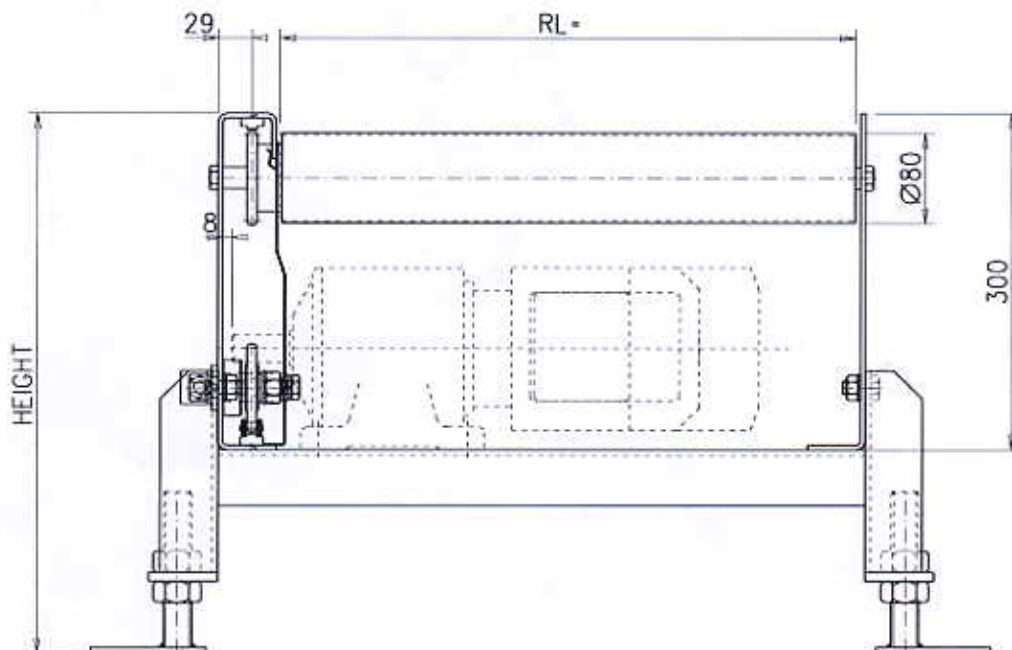

SHEET NO. 1 RTC